



Europäisches Patentamt  
European Patent Office  
Offic européen d s brev ts



(11) Publication number : **0 478 303 A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : **91308741.7**

(51) Int. Cl.<sup>5</sup> : **H01M 4/58, H01M 4/62,  
C01G 31/00**

(22) Date of filing : **25.09.91**

(30) Priority : **27.09.90 US 589120**

(43) Date of publication of application :  
**01.04.92 Bulletin 92/14**

(84) Designated Contracting States :  
**DE FR GB NL SE**

(71) Applicant : **MEDTRONIC, INC.**  
**7000 Central Avenue N.E.**  
**Minneapolis, Minnesota 55432-3576 (US)**

(72) Inventor : **Crespi, Ann M.**  
**4915 12th Avenue South**  
**Minneapolis, Minnesota 55417 (US)**

(74) Representative : **Cockbain, Julian et al**  
**Frank B. Dehn & Co. Imperial House 15-19,**  
**Kingsway**  
**London WC2B 6UZ (GB)**


(54) **Silver vanadium oxide cathode material.**

(57) The use as a cathode material for electrochemical cells of a silver vanadium oxide prepared by a chemical combination or addition reaction.

Electrochemical cells produced according to the invention are able to maintain a higher pulse voltage thereby decreasing the charge time and resulting in an increased cell life.

The present invention relates to high energy, high power density electrochemical cells and more particularly to an improved silver vanadium oxide cathode material for use in such cells, together with a method for its preparation.

Silver vanadium oxide (SVO) is generally already known and used in batteries. Its preparation for use in batteries by means of a decomposition reaction is also well known (see US Patent Nos. 4310609 and 4391729). These patents disclose the following decomposition reaction for the preparation of SVO:



This decomposition reaction is accompanied by the evolution of gaseous products.

It has also been suggested that SVO can be prepared by addition or combination reactions: see Liang US Patent No. 4391729 (col. 2, lines 35-37); Bernard Raveau: Etudes sur les systèmes V-Ag-O et V-Cu-O, Revue de Chimie minérale t.4 No. 668: 729 (1967); André Casalot and Michael Pouchard: Sur quelques nouvelles phases non-stoechiométriques du système Ag<sub>2</sub>O-V<sub>2</sub>O<sub>5</sub>-VO<sub>2</sub>, 1. - Etude chimique et cristallographique, Bulletin De La Société Chimique De France No. 10 (1967); and B.B. Scholtens Diffusion of Silver in Silver Vanadium Bronzes, Mat. Res. Bull. 11: 1533-1538 (1976) Pergamon Press, Inc.

An object of the present invention is to provide an improved SVO cathode material with increased crystallinity by means of a combination or addition reaction without involving decomposition and thus without the evolution of any gaseous products.

We have now found that SVO cathode material prepared by chemical combination or addition reactions provides improved cells as compared to those which use SVO prepared by the decomposition reaction described above. Additionally, the procedure for preparation is easier. The cathode material is improved in the sense that such cells maintain a higher pulse voltage than those which use SVO prepared by a decomposition reaction. A higher pulse voltage leads to a decrease in charge time and hence an increase in cell life, eg. when used in devices such as cardiac defibrillators.

Thus viewed from one aspect the present invention provides the use as a cathode material for electrochemical cells of a silver vanadium oxide prepared by a chemical combination or addition reaction.


Viewed from a further aspect the invention provides a cathode member for an electrochemical cell characterised in that said member comprises silver vanadium oxide prepared by a chemical combination or addition reaction.

Viewed from a still further aspect the invention provides an electrochemical cell containing a silver vanadium oxide cathode characterised in that the silver vanadium oxide of said cell is prepared by a chemical combination or addition reaction.


The material which constitutes the cathode may further comprise a binder material and/or a conductive material. Binder materials suitable for use in accordance with the invention include methyl cellulose, ethylene propylene diene terpolymer (EPDM), polyethylene, polypropylene and fluorinated ethylene propylene (FEP) which may optionally be used with carbon black and/or graphite conductive material, and Teflon.

Viewed from a yet still further aspect the present invention also provides a process for the preparation of a silver vanadium oxide cathode material, said process comprising at least one of the following steps:


- (a) reacting silver, silver oxide or a silver vanadate with vanadium oxide, preferably in an oxidizing atmosphere;
- (b) reacting Ag<sub>2</sub>O with V<sub>2</sub>O<sub>5</sub> in about a 1:2 mole ratio, in an oxidising atmosphere:



- (c) reacting a silver compound or silver with V<sub>2</sub>O<sub>5</sub> in about a 1:1 mole ratio, in an oxidising atmosphere:



- (d) reacting AgVO<sub>3</sub> with V<sub>2</sub>O<sub>5</sub> in about a 2:1 mole ratio in an oxidising or an inert atmosphere:



- (e) mixing a compound obtained in any one of steps (a) to (d) with a binder and/or a conductive material.

The addition reaction of step (c) yields Ag<sub>2</sub>V<sub>4</sub>O<sub>11</sub> or Ag<sub>2</sub>V<sub>4</sub>O<sub>11-y</sub> (wherein y is in the range of from 0.25 to 0.35) depending on the reaction conditions, i.e. in oxidising or inert atmospheres.

The addition reactions of steps (a) to (d) may conveniently be carried out at a temperature of from 450°C to 550°C, preferably at temperatures of about 520°C and may proceed to completion within about 5 to 24 hours.

However, particular temperatures are not critical and may vary over a wide range such as from 300°C to 700°C. Lower temperatures require a longer reaction time. Once the reaction is completed, the material may be held at elevated temperature indefinitely, although undesirable grain growth may occur. Longer reaction times and higher temperatures may lead to diminished rate capability in cells and therefore, in general, the lower temperatures are preferred in order to limit grain growth in the reaction product.

Mixing of the reactants in the ratios specified is preferred although an excess of either initial reactant may be used. However, in such cases, the result is a mixture which may be difficult to separate. However, a non-stoichiometric mixture may be used.

Suitable inert atmospheres for the above reactions include for example argon, nitrogen and helium and suitable oxidising atmospheres include air and oxygen.

Preferred embodiments of the invention will now be described by way of example and with reference to the accompanying drawings in which:

Figures 1 and 2 are graphs comparing open-circuit voltage and minimum pulse voltage for test cells using the cathode material of the invention (Figure 1) and the cathode material of the prior art "decomposition" type (Figure 2).

Figure 3 is a group of X-ray diffraction patterns of the prior art cathode material (3a) and the cathode material of the invention (3b and 3c).

### Examples

AgVO<sub>3</sub> and V<sub>2</sub>O<sub>5</sub> powders in a 2:1 mole ratio were milled together and heated at 520°C under a flowing argon atmosphere to produce Ag<sub>2</sub>V<sub>4</sub>O<sub>11-y</sub>, and under a flowing oxygen atmosphere to produce Ag<sub>2</sub>V<sub>4</sub>O<sub>11</sub>. Ag<sub>2</sub>O and V<sub>2</sub>O<sub>5</sub> powders in a 1:2 mole ratio were also milled together and heated under the same conditions to produce the same products. The resultant products were then mixed with carbon black (a conductive material) and Teflon (a binder material) and incorporated into high-rate cells.

The test cells were constructed from small rectangular strips of cathode material having an area of 4cm<sup>2</sup> on each side which were then sandwiched between plates of lithium and fitted into a case filled with electrolyte. The electrolyte used was a 1:1 (by volume) mixture of propylene carbonate and diglyme containing 1M lithium perchlorate (LiClO<sub>4</sub>). A separator of porous polypropylene was inserted between the lithium plates and the cathode material. Similar test cells using the cathode material prepared by the prior art decomposition reaction were also prepared.

Each cell was discharged at a current density of 63 µA/cm<sup>2</sup>. The discharge was periodically interrupted and the cells were then allowed to rest on open-circuit prior to a high current pulse. The open-circuit voltage immediately prior to the pulse was recorded and is shown in the upper traces of Figures 1 and 2. The cells were then pulsed at current densities of 12 or 19 mA/cm<sup>2</sup>. Two cells were pulsed at each current density. The pulses were terminated when 0.25J/cm<sup>2</sup> of energy had been delivered. The lower traces of Figures 1 and 2 represent the minimum voltage achieved during the pulse. It can be readily seen in Figure 1 that the material of the present invention provides a surprisingly smaller difference between open-circuit voltage and minimum pulse voltage than the prior art material of Figure 2.

Plots 3b and 3c are essentially identical, but Plot 3a has a higher background level, indicating lower crystallinity of the prior art material. Although the peaks are in the same position in each plot, they are sharper in plots 3b and 3c than in plot 3a, and in some cases two distinct peaks appear in plots 3b and 3c where only a single broad peak appeared in plot 3a. These observations all indicate a higher degree of crystallinity in the cathode material of the invention than in the prior art cathode material, which is surprising because high crystallinity is often associated with low rate capability in metal oxide cathodes.

Electrochemical cells comprising the cathode material of the invention are suitable for use in devices such as cardiac defibrillators etc. requiring a high pulse voltage.

### Claims

1. The use as a cathode material for electrochemical cells of a silver vanadium oxide prepared by a chemical combination or addition reaction.
2. A cathode member for an electrochemical cell characterised in that said member comprises silver vanadium oxide prepared by a chemical combination or addition reaction.
3. A cathode member as claimed in claim 2 which further comprises a binder material and a conductive ma-

terial.

4. A cathode member as claimed in claim 3 wherein said binder material comprises methyl cellulose, ethylene propylene diene terpolymer (EPDM), polyethylene, polypropylene, fluorinated ethylene propylene (FEP) or Teflon.
5. A cathode member as claimed in either of claims 3 and 4 wherein said conductive material comprises carbon black or graphite.
6. An electrochemical cell containing a silver vanadium oxide cathode characterised in that the silver vanadium oxide of said cell is prepared by a chemical combination or addition reaction.
7. A process for the preparation of a cathode material as claimed in any one of claims 2 to 5, said process comprising at least one of the following steps:
  - (a) reacting silver, silver oxide or a silver vanadate with vanadium oxide, preferably in an oxidizing atmosphere;
  - (b) reacting  $\text{Ag}_2\text{O}$  with  $\text{V}_2\text{O}_5$  in an oxidising atmosphere;
  - (c) reacting a silver compound or silver with  $\text{V}_2\text{O}_5$  in an oxidising atmosphere;
  - (d) reacting  $\text{AgVO}_3$  with  $\text{V}_2\text{O}_5$  in an oxidising or an inert atmosphere; or
  - (e) mixing a compound obtained in any one of steps (a) to (d) with a binder material and/or a conductive material.
8. A process as claimed in claim 7 wherein the  $\text{Ag}_2\text{O}/\text{V}_2\text{O}_5$  reactants in step (b) are provided in a 1:2 mole ratio.
9. A process as claimed in claim 7 wherein the silver or silver compound and  $\text{V}_2\text{O}_5$  reactants in step (c) are provided in a 1:1 mole ratio.
10. A process as claimed in claim 7 wherein the  $\text{AgVO}_3/\text{V}_2\text{O}_5$  reactants in step (d) are provided in a 2:1 mole ratio.
11. A process as claimed in any one of claims 7 to 10 wherein the reactants are heated at a temperature in the range of from 450°C to 550°C.
12. A process as claimed in any one of claims 7 to 11 wherein the reactants are in powder form.
13. A process as claimed in claim 12 wherein said powdered reactants are milled together.

*Fig. 1*

$\text{Ag}_2\text{V}_4\text{O}_{11}$  FROM 2  $\text{AgVO}_3$  +  $\text{V}_2\text{O}_5$

HIGH-CURRENT PULSE TEST


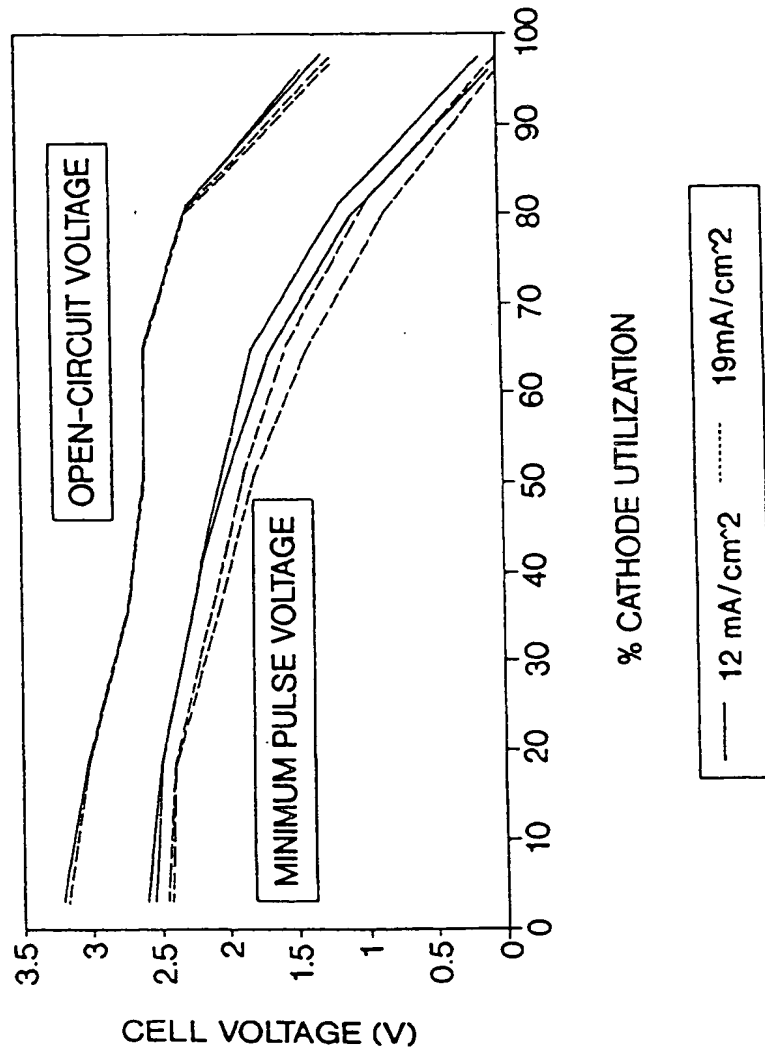


Fig. 2

 $\text{Ag}_2\text{V}_4\text{O}_{11}$  FROM  $2 \text{AgNO}_3 + 2 \text{V}_2\text{O}_5$ 

HIGH-CURRENT PULSE TEST

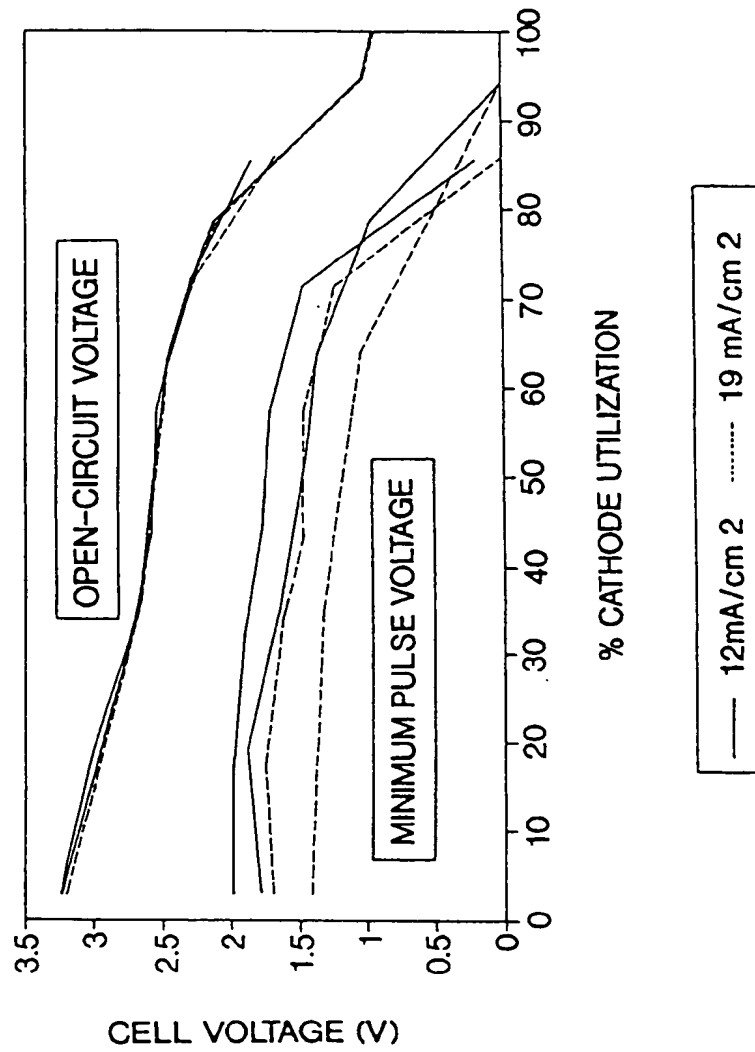

X-RAY DIFFRACTION PATTERNS OF  $\text{Ag}_2\text{V}_4\text{O}_{11}$  ( $\text{CuK}\alpha$  RADIATION)

POWDER

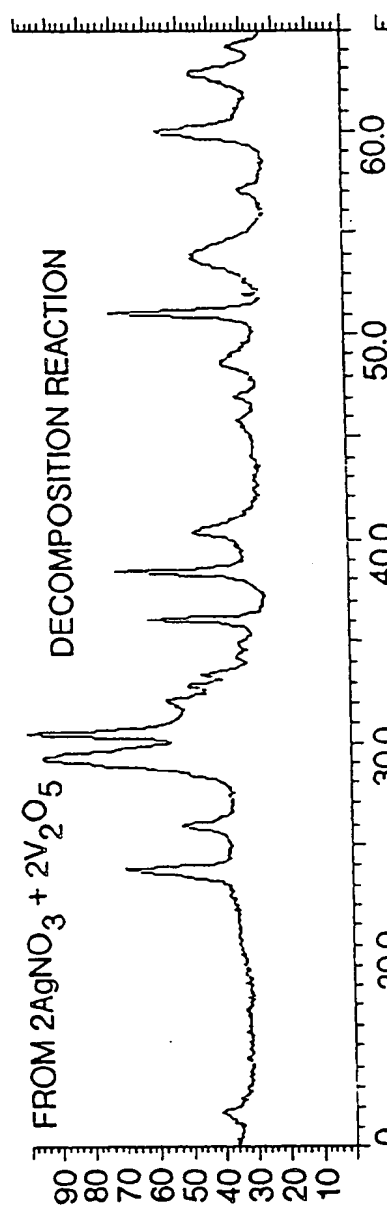


Fig. 3a

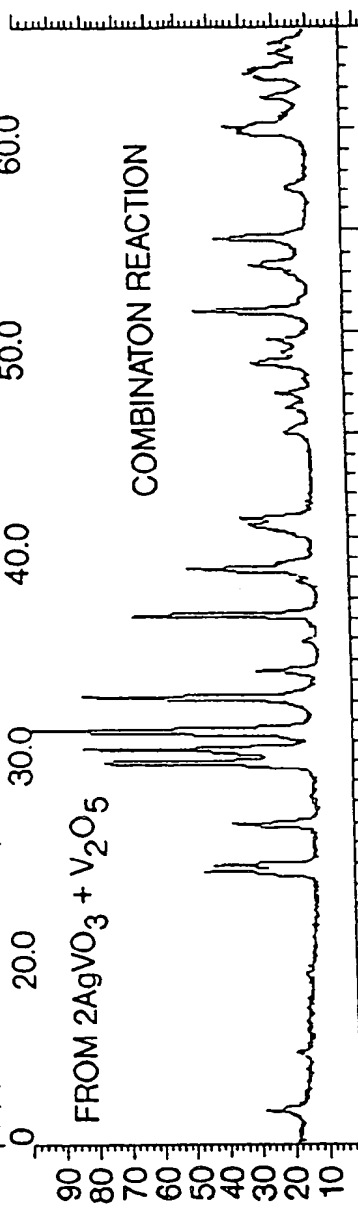


Fig. 3b

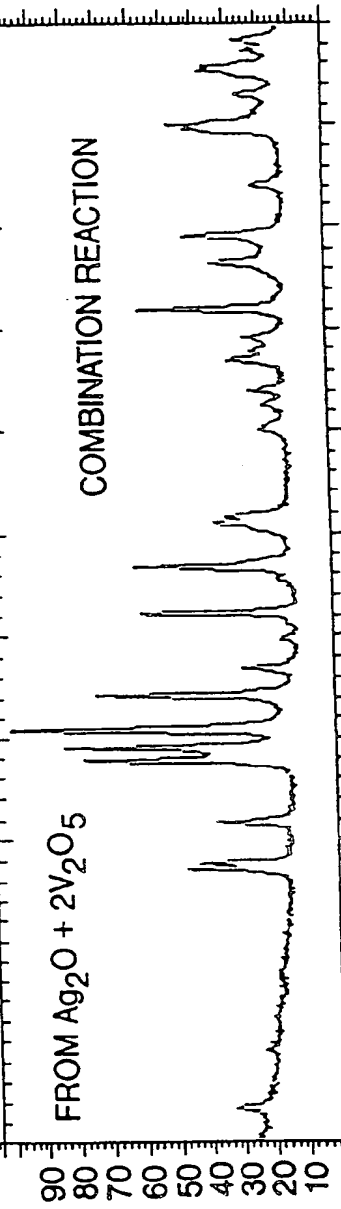


Fig. 3c

**THIS PAGE BLANK (USPTO)**





Eur päisches Patentamt  
European Patent Office  
Office européen d s brevets



⑪ Publication number : **0 478 303 A3**

⑫

## EUROPEAN PATENT APPLICATION

⑳ Application number : **91308741.7**

㉑ Int. Cl.<sup>5</sup> : **H01M 4/48, C01G 31/00,  
H01M 4/62**

㉒ Date of filing : **25.09.91**

㉓ Priority : **27.09.90 US 589120**

㉔ Date of publication of application :  
**01.04.92 Bulletin 92/14**

㉕ Designated Contracting States :  
**DE FR GB NL SE**

㉖ Date of deferred publication of search report :  
**19.08.92 Bulletin 92/34**

㉗ Applicant : **MEDTRONIC, INC.**  
**7000 Central Avenue N.E.**  
**Minneapolis, Minnesota 55432-3576 (US)**

㉘ Inventor : **Crespi, Ann M.**  
**4915 12th Avenue South**  
**Minneapolis, Minnesota 55417 (US)**

㉙ Representative : **Cockbain, Julian, Dr. et al**  
**Frank B. Dehn & Co. Imperial House 15-19,**  
**Kingsway**  
**London WC2B 6UZ (GB)**

㉚ **Silver vanadium oxide cathode material.**

㉛ The use as a cathode material for electrochemical cells of a silver vanadium oxide prepared by a chemical combination or addition reaction.

Electrochemical cells produced according to the invention are able to maintain a higher pulse voltage thereby decreasing the charge time and resulting in an increased cell life.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 91 30 8741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL5)
X	EP-A-0 380 058 (MATSUSHITA ELECTRIC CO.)  * column 10, line 43 - line 57 * * column 12, line 37 - line 51 * ---	1, 2, 6, 7, 12, 13	H01M4/48 C01G31/00 H01M4/62
P, X	PATENT ABSTRACTS OF JAPAN vol. 015, no. 271 (C-848) 10 July 1991 & JP-A-3 093 628 ( MATSUSHITA ELECTRIC COMP. ) 18 April 1991 * abstract *  -----	1, 2, 6, 7, 12, 13	
			TECHNICAL FIELDS SEARCHED (Int. CL5)
			H01M C01G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 25 JUNE 1992	Examiner ANDREWS M. P.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.82) (P0401)